
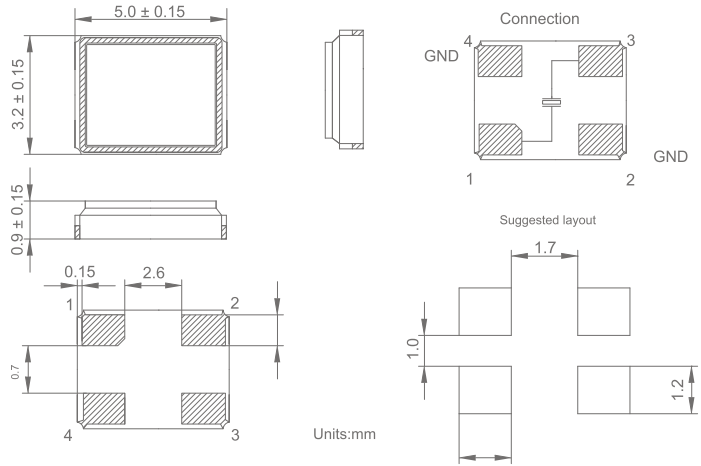


Dimensions(mm)



GENERIC SPECIFICATION

ITEM		QCS5 SMD5032-C4	REMARK
Nominal Frequency Range		8MHz to 150MHz	
Frequency tolerance @25 °C		±10ppm to ±100 ppm	Others are offered
Load Capacitance		8 pF to ∞pF	Please specify
Frequency temperature characteristics		±10ppm to ±100 ppm	Others are offered
Temperature Range	Storage Temp.	-40°C~ +85°C/-55°C~ +125°C	
	Operating Temp.	-10°C~ +60°C to -40°C~ +85°C	Others are offered
Drive Level		10uW to 100uW(Typical:10uW)	Please specify
Equivalent Series Resistance		As Per Table	
Shunt Capacitance		5.0pF Max.	
Insulation Resistance		More than 500MΩ @ DC 100V	
Aging		First year ±3ppm	

MOTIONAL (SERIES) RESISTANCE (R1)

Frequency Range	8MHz-10MHz	10MHz-12MHz	12MHz-16MHz	16MHz-20MHz	20MHz-24MHz	24MHz-50MHz	40MHz-150MHz
Mode	Fundamental	Fundamental	Fundamental	Fundamental	Fundamental	Fundamental	3 rd Overtone
R1	100Ω max	80Ω max	60Ω max	50Ω max	40Ω max	30Ω max	80Ω max